

The logo for ELYTE, featuring the word "ELYTE" in a bold, white, sans-serif font. The letter "E" is stylized with a circular element on its left side. The background is a dark, blurred image of many rows of clear plastic bottles in a factory setting.

ELYTE

# Packaging & Delivery

Industrial usage & Bottles



# Content

## Industrial usage

- 1 Packaging units 03
- 2 Delivery 04


## Bottles

- 3 Packaging units 05
- 4 Delivery 06
- 5 Contact 07

Industrial usage

# Packaging units

	1 L drum	5,5 L drum	20 L drum	210 L drum
<b>Diameter</b> [mm]	<=130	<=203	320	576
<b>Height</b> [mm]	<=233	<=365	510	1078
<b>Net weight</b> [kg]	3,0	6,15	11	49
<b>Material</b>	Stainless steel	Stainless steel	Stainless steel	Stainless steel
<b>Certification</b>	UN certified	UN certified	UN certified	UN certified
<b>Quick couplings</b>	Nitto Kohki type 1P-304 for inert gas Nitto Kohki type 2P-304 for product	Nitto Kohki type 1P-304 for inert gas Nitto Kohki type 2P-304 for product	Nitto Kohki type 1P-304 for inert gas Nitto Kohki type 2P-304 for product	Nitto Kohki type 2P-304 for inert gas Nitto Kohki type 4P-304 for product
<b>Minimum order quantity</b>	-	-	-	2 drums
<b>Larger packaging units</b>	1000L IBC und ISO-Container: Details available on request and optimized delivery set-up to be mutually defined.			

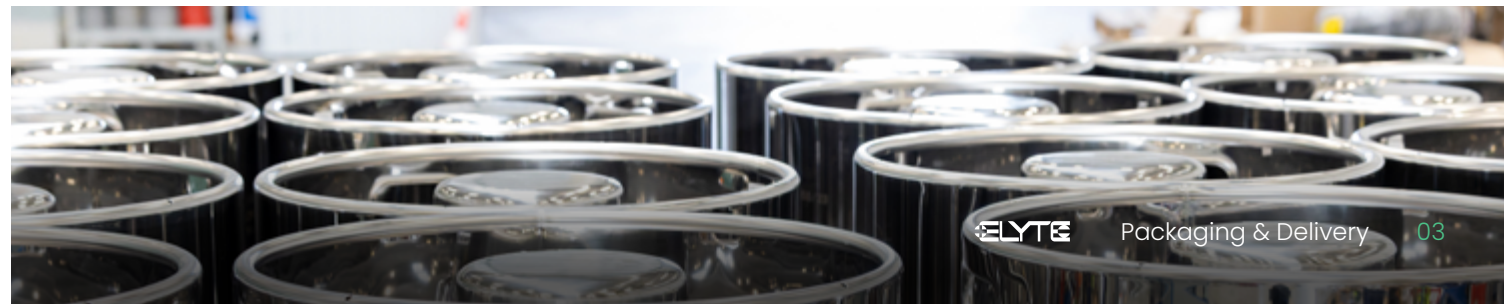

## Industrial usage

# Delivery

Depending on the individual recipe and batch size, the product is delivered either by land freight, air freight or by sea freight. The delivery time depends on the recipe and in particular the customs regulations in the respective country.

### Temperature controlled shipping (optional)

- Shipping in a temperature-controlled container
- Temperature range of 2–8°C
- Constant temperature maintenance during shipping
- Temperature control and documentation upon delivery

### Loading

#### 20-foot standard container

(internal dimensions  
589 x 235 x 239 cm)

10 container pallets

#### 40-foot standard container

(internal dimensions  
1203 x 235 x 239 cm)

20 container pallets

#### Land freight via truck

22 industrial drum pallets



	1 L drum	5,5 L drum	20 L drum	210 L drum
<b>Possible drums per</b>				
• <b>Eu pallet</b> (120 cm x 80 cm)	- individual shipping -	- individual shipping -	max. 9 drums per pallet	max. 2 drums per pallet
• <b>Container pallet</b> (114 cm x 114 cm)	- individual shipping -	- individual shipping -	max. 12 drums per pallet	max. 3 drums per pallet
• <b>Industrial drum pallet</b> (120 cm x 120 cm)	- individual shipping -	- individual shipping -	max. 12 drums per pallet	max. 4 drums per pallet



## Bottles

# Packaging units

	30 ml	65 ml	125 ml		
<b>Bottle dimensions</b>	3,0 x 7,0 cm	3,7 x 8,5 cm	4,5 x 11,5 cm		
<b>Bottle cap diameter</b>	Ø 13,8 mm	Ø 13,8 mm	Ø 13,8 mm		
<b>Additional information</b>	<ul style="list-style-type: none"> <li>• Black plastic threaded sleeve</li> <li>• Aluminum bottle System 210</li> </ul>	<ul style="list-style-type: none"> <li>• Black plastic threaded sleeve</li> <li>• Aluminum bottle System 210</li> </ul>	<ul style="list-style-type: none"> <li>• Black plastic threaded sleeve</li> <li>• Aluminum bottle System 210</li> </ul>		
	<b>325 ml</b>	<b>625 ml</b>	<b>1250 ml</b>	<b>2500 ml</b>	
<b>Bottle dimensions</b>	6,5 x 15,0 cm	7,5 x 21,0 cm	8,5 x 26,0 cm	12,0 x 28,0 cm	
<b>Bottle cap diameter</b>	Ø 42 mm	Ø 42 mm	Ø 42 mm	Ø 42 mm	
<b>Additional information</b>	<ul style="list-style-type: none"> <li>• PE screw cap with locking mechanism and PTFE seal</li> <li>• Aluminum bottle System 51 UN</li> <li>• UN code: 1B1/X/250</li> </ul>	<ul style="list-style-type: none"> <li>• PE screw cap with locking mechanism and PTFE seal</li> <li>• Aluminum bottle System 51 UN</li> <li>• UN code: 1B1/X/250</li> </ul>	<ul style="list-style-type: none"> <li>• PE screw cap with locking mechanism and PTFE seal</li> <li>• Aluminum bottle System 51 UN</li> <li>• UN code: 1B1/X/250</li> </ul>	<ul style="list-style-type: none"> <li>• PE screw cap with locking mechanism and PTFE seal</li> <li>• Aluminum bottle System 51 UN</li> <li>• UN code: 1B1/X/250</li> </ul>	

## Bottles

# Delivery

Depending on the individual recipe and batch size, the product is delivered either by land freight, air freight or by sea freight. The delivery time depends on the recipe and in particular the customs regulations in the respective country.

### Temperature controlled shipping (optional)

- Special packaging to protect against temperature fluctuations
- Temperature range of 2–8°C
- Constant temperature maintenance during shipping
- No direct contact between the cooling elements and the shipped goods
- Temperature control and documentation upon delivery

Each bottle is **sealed in pouch foil under inert atmosphere**. The pouches are additionally secured in a dangerous goods cardboard packaging.

### Our dangerous goods cardboard packagings

<b>Size in cm</b> [length x width x height]	16 x 13,5 x 19	19 x 17 x 28	27,5 x 19,5 x 30	36 x 26 x 30	43 x 31 x 30
<b>UN number</b>	4GV/X1.7/S	4GV/X5.8/S	4GV/X7.3/S	4GV/X14/S	4GV/X22/S



*Let's get started*

# Contact

[sales@e-lyte.de](mailto:sales@e-lyte.de)

[www.e-lyte.de](http://www.e-lyte.de)

**E-lyte Innovations GmbH**  
*HQ, Production & Analytics*

Werner-Heisenberg-Str. 1  
67661 Kaiserslautern  
Germany

---

**E-lyte Innovations GmbH**  
*R&D Center and Lab-Scale Production*

Mendelstr. 11  
48149 Münster  
Germany

